



An ISO 9001 : 2015 Certified Company

*Lights to Illuminate
Home & Hearts*

PRODUCT CATALOG



Nitin Jain

MESSAGE FROM OUR CHAIRMAN

I'm deeply honored to established and lead **HiWAY Lighting Solutions Pvt. Ltd.**, a renowned LED brand in India. I did Master of Computer Application degree from RGPV University in Indore and worked for 13 years in IT industries as Solution Architect and had wide industries experience by working different countries and cultures. I worked in USA, Denmark, Australia and China for many years. I have executed million dollar projects successfully across countries. Due to progressive vision and strong felling to serve for India, I quit the job in USA and started my own business in LED Lights. I started business carrier with products trading, setup own brand and in a very short period of time setup a manufacturing unit as "**HiWAY Lighting Solutions Pvt. Ltd.**"

Agility and innovation will be crucial to our continued success. Let's build on our past achievements, embrace the future together and continue exceeding expectations.

As a Chairperson, I pledge to lead **HiWAY** company with vision, integrity and unwavering dedication to our core values. Let's reaffirm our commitment to excellence, foster collaboration and inclusivity and strive to exceed expectations. I extend my most profound appreciation to every member of the HiWAY family. Let's march forward, inspired by our past achievements and driven by limitless possibilities. Relationships are key to success. We value our customers trust ad strive to exceed their expectations through open communication and collaboration.

Thank you for considering **HiWAY family**.

We Believe light is more than just illumination. it is innovation, progress, and the path to a sustainable future.

ENTERPRISE INTRODUCTION

Hiway Lighting Solutions Pvt. Ltd. is a premier Indian manufacturer, trader, and exporter specializing in advanced, energy-efficient **LED lighting solutions**. We provide a comprehensive range of products for commercial, industrial, infra structural, and smart outdoor applications.

Our commitment to excellence is rooted in combining innovation, energy efficiency, and durability to meet the demands of modern infrastructure projects. Our strategic associations with industry leaders, continue to reinforce our strong presence in the Indian infrastructure market.

Our Product Range: We offer an extensive selection including LED street lights, flood lights, solar-powered systems, recessed panels, track lights, and smart lighting solutions featuring motion and daylight sensors. Designed for use in diverse environments—from highways and industrial zones to corporate buildings and smart cities—our products guarantee exceptional performance and substantial energy savings. We utilize state-of-the-art manufacturing processes and uphold rigorous quality control, ensuring every product is a testament to our commitment to quality and responsibility.

NAME : HIWAY LIGHTING SOLUTIONS PRIVATE LIMITED
GSTN : 23AAECH7954D1ZO
STATE : Madhya Pradesh
ADDRESS : SURVEY NO. 142/2, VILLAGE GARIPIPLIYA
SAWER, INDORE, Indore, Madhya Pradesh, 453771

NAME : HIWAY LIGHTING SOLUTIONS FZ-LL
ADDRESS : CFDRK7222, Compass Building, Al Shohada Road,
Al Hamra Industrial Zone-FZ, Ras Al Khaimah, United
Arab Emirates
PHONE : +971 54 482 9592
Email : info@hiwayledlights.com
G Website : www.hiwayledlights.com

NAME : HIWAY LIGHTING SOLUTIONS PRIVATE LIMITED
GSTN : 10AAECH7954D1ZV
STATE : Bihar
ADDRESS : B-72, TRANSPORT NAGAR, BAHADURPUR,
KUMHRAR, Patna, Patna, Bihar, 800007

NAME : HIWAY LIGHTING SOLUTIONS PRIVATE LIMITED
GSTN : 09AAECH7954D1ZE
STATE : Uttar Pradesh
ADDRESS : E-174, Kanpur Road, Transport Nagar, Lucknow,
U.P., 226012

Factory Tour

Our state-of-the-art infrastructure is constructed over an extensive area and is divided into various departments like production unit, quality inspection, sales and marketing, etc. These segregated units work in close-synchronization for providing best quality products within the committed time frame. Our infrastructure is regularly upgraded to ensure trouble-free business operations. In our team, we have adroit team of personnel who have great professional acumen and rich industry experience. Different seminars and training sessions are also conducted for our team members that help them in updating their knowledge according to the current developments in the market.



Front Desk



Driver Manufacturing Unit



Pcb Manufacturing Unit



Reflow Oven



Powder Coating Booth



Powder Coating Oven



Wire Cutting & Stripping



Pad Printing



Laser Printing



Repairing Unit








Testing Unit



Product Display

CERTIFICATES

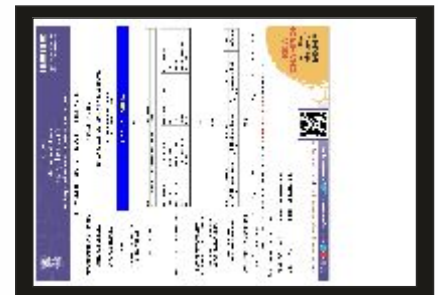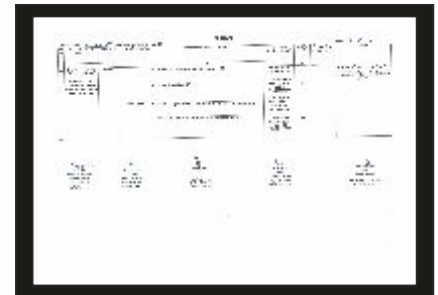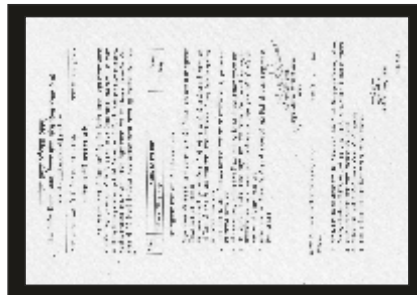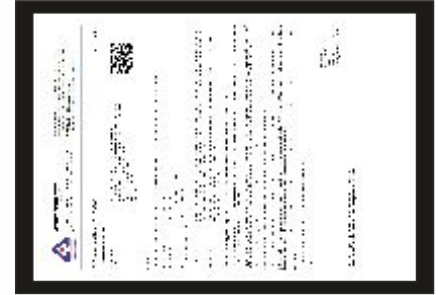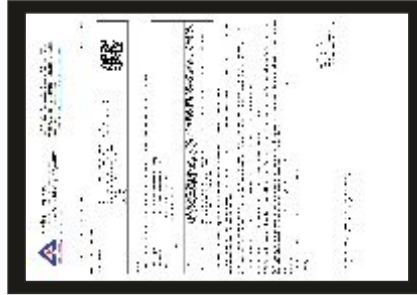

OUR PRESTIGIOUS CUSTOMERS



**And many
more ...**

GLANZA OUTER FACERING OPTIONS



Round Face Ring



Round Trimless Face Ring



Square Single Head Face Ring



Square Single Head Trimless Face Ring



Square Double Head Face Ring



Square Double Head

GLANZA INNER FACERING



White



Matt-black



Pearl Shining black



Rose-gold



Gold



Chrome



Fog-silver



Ellipses Ring



Round Circle Ring
(75mmCutout)



Glanza Wall Washer Black



Glanza Wall Washer chrome



Glanza Wall Washer Pearl Shining Black Ring
(75mmCutout)

GLANZA FILTERS OPTIONS



Single Asymmetric Filter




Double Asymmetric Filter



Linear Filter

GLANZA HONEY COMB



Honeycomb Mesh
(7-40W)



RF 2.4G




TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



FILTER APPLICATION

Flat Face Up

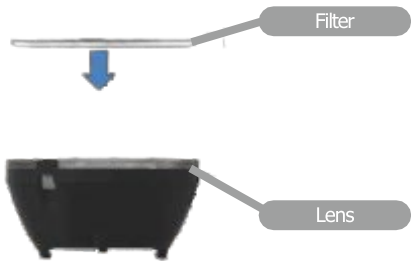

Linear filter

Single Asymmetric


Double Asymmetric

Vertical Down Mounting




Different Angle Different Filter Different Effect


24°




24°+Linear



24°+Single Asymmetric



24°+Double Asymmetric




Direct Lens

Single Asymmetric

Double Asymmetric

Linear Filter

15°



24°




36°



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



GLANZA MODEL (FRONT OPENABLE)



WATTAGE	6-8W	10-15W	18-20W	25-30W	32-40W
DIAMETER	65mm	85mm	105mm	105mm	135mm
HEIGHT	78mm	101mm	110mm	121mm	142mm
CUTOUT	55mm	75mm	95mm	95mm	120mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
OPTICS	HERCULUX
LUMEN EFFICIENCY	120-140LM/W
INNER RING COLOUR	WHITE/MATTBLACK/GOLD/ROSEGOLD/ CHROME / SILVER / PEARL SHINING BLACK
OUTER RING COLOUR	WHITE / BLACK
CRI	80/90
HEAT SINK COLOUR	GREY
BEAM ANGLE	15°/24°/36°/55° 5° AVAILABLE IN 75mm CUTOUT



RF 2.4G



TRICOLOUR WITH RF+BT+WIFI DIMMING AVAILABLE




GLANZA TRIMLESS MODEL



WATTAGE	5-8W	12-15W	15-20W	25-30W
DIAMETER	88mm	108mm	128mm	128mm
HEIGHT	78mm	101mm	110mm	121mm
CUTOUT	55mm	75mm	95mm	95mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
OPTICS	HERCULUX
LUMEN EFFICIENCY	120-140LM/W
INNER RING COLOUR	WHITE/MATTBLACK/GOLD/ROSEGOLD/ CHROME / SILVER / PEARL SHINING BLACK
OUTER RING COLOUR	WHITE / BLACK
CRI	80/90
HEAT SINK COLOUR	GREY
BEAM ANGLE	15°/24°/36°/55° 5° AVAILABLE IN 75mm CUTOUT




Honeycomb Mesh
Available for all size



RF 2.4G



TRICOLOUR WITH RF+BT+WIFI DIMMING AVAILABLE



GLANZA SQUARE MODEL



WATTAGE	6-8W	12-15W	18-20W	25-30W
DIAMETER	65mmx65mm	85mmx85mm	105mmx105mm	105mmx105mm
HEIGHT	85mm	111mm	124mm	135mm
CUTOUT	55mmx55mm	75mmx75mm	95mmx95mm	95mmx95mm

GLANZA SQUARE TRIMLESS MODEL



WATTAGE	6-8W	12-15W	18-20W	25-30W
DIAMETER	65mmx65mm	85mmx85mm	105mmx105mm	95mmx95mm
HEIGHT	85mm	111mm	124mm	135mm
CUTOUT	58mmx55mm	78mmx75mm	98mmx95mm	98mmx95mm


LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
OPTICS	HERCULUX
LUMEN EFFICIENCY	120-140LM/W
INNER RING COLOUR	WHITE/MATTBLACK/GOLD/ROSEGOLD/ CHROME / SILVER / PEARL SHINING BLACK
OUTER RING COLOUR	WHITE / BLACK
CRI	80/90
HEATSINK COLOUR	GREY
BEAM ANGLE	15°/24°/36°/55° 5° AVAILABLE IN 75mm CUTOUT



RF 2.4G



TRICOLOUR WITH RF+BT+WIFI DIMMING AVAILABLE



GLANZA SQUARE DOUBLE MODEL



WATTAGE	7WX2	12WX2	18WX2	25WX2
DIAMETER	115mmX65mm	155mmx85mm	195mmx105mm	195mmx105mm
HEIGHT	85mm	111mm	124mm	135mm
CUTOUT	105mmx55mm	145mmx75mm	185mmx95mm	185mmx95mm

GLANZA SQUARE DOUBLE TRIMLESS MODEL



WATTAGE	7WX2	12WX2	18WX2	25WX2
DIAMETER	115mmX65mm	155mmx85mm	195mmx105mm	195mmx105mm
HEIGHT	85mm	111mm	124mm	135mm
CUTOUT	105mmx58mm	145mmx78mm	185mmx98mm	185mmx98mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
OPTICS	HERCULUX
LUMENEFFICIENCY	120-140LM/W
INNERRINGCOLOUR	WHITE/MATTBLACK/GOLD/ROSEGOLD/ CHROME / SILVER / PEARL SHINING BLACK
OUTER RING COLOUR	WHITE / BLACK
CRI	80/90
HEATSINKCOLOUR	GREY
BEAM ANGLE	15°/24°/36°/55° 5°AVAILABLEIN75mmCUTOUT



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



GLANZA TALL MODEL



WATTAGE	7-15W	18-25W
DIAMETER	65mm	85mm
HEIGHT	114mm	147mm
CUTOUT	55mm	75mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
INNER RING COLOUR	WHITE/MATTBLACK/GOLD/ROSEGOLD/ CHROME / SILVER / PEARL SHINING BLACK
OUTER RING COLOUR	WHITE / BLACK
BEAM ANGLE	15°/24°/36°/55° 5°AVAILABLEIN75mmCUTOUT

GLANZA TALL TRIMLESS MODEL



WATTAGE	7-15W	18-25W
DIAMETER	88mm	108mm
HEIGHT	114mm	147mm
CUTOUT	55mm	75mm


LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
INNER RING COLOUR	WHITE/MATTBLACK/GOLD/ROSEGOLD/ CHROME / SILVER / PEARL SHINING BLACK
OUTER RING COLOUR	WHITE / BLACK
BEAM ANGLE	15°/24°/36°/55° 5°AVAILABLEIN75mmCUTOUT

GLANZA TALL SQUARE MODEL



WATTAGE	7-15W	18-25W
DIAMETER	65*65mm	85*85mm
HEIGHT	121mm	158mm
CUTOUT	58*55mm	78*75mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
INNER RING COLOUR	WHITE/MATTBLACK/GOLD/ROSEGOLD/ CHROME / SILVER / PEARL SHINING BLACK
OUTER RING COLOUR	WHITE / BLACK
BEAM ANGLE	15°/24°/36°/55° 5°AVAILABLEIN75mmCUTOUT



GLANZA TALL SQUARE DOUBLE MODEL



WATTAGE	7*7W/15*15W	18*18W/25*25W
DIAMETER	115*65mm	155*85mm
HEIGHT	121mm	158mm
CUTOUT	105*58mm	145*78mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 2700K/3000K/3500K/4000K/5000K/6500K
 INNER RING COLOUR WHITE/MATTBLACK/GOLD/ROSEGOLD/
 CHROME / SILVER / PEARL SHINING BLACK
 OUTER RING COLOUR WHITE / BLACK
 BEAM ANGLE 15°/24°/36°/55°
 5°AVAILABLEIN75mmCUTOUT

ECO SPOT LIGHT (FRONT OPENABLE)



WATTAGE	6-8W	10-12W	15-18W
DIAMETER	80MM	85MM	110MM
HEIGHT	77MM	78MM	103MM
CUTOUT	55MM	75MM	95MM

LED BRIDGELUX/CREE
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 2700K/3000K/3500K/4000K/5000K/6500K
 LUMEN EFFICIENCY 120-140 LM / W
 LEDBEAMANGLE 36°
 RINGCOLOUR WHITE/MATTBLACK/SHININGBLACK/CHROME/
 ROSE GOLD/GOLD /PEARLSHININGBLACK
 BODYCOLOUR WHITE/BLACK
 MATERIAL ALUMINUMDIECASTING



Honeycomb Mesh
Available for all size




RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



DOME ROUND SURFACE 12W

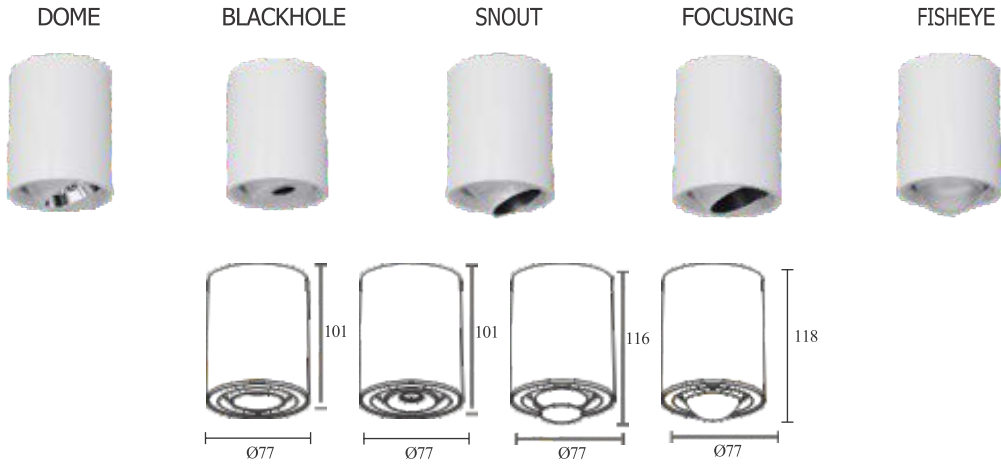


DOME SQUARE SURFACE 12W

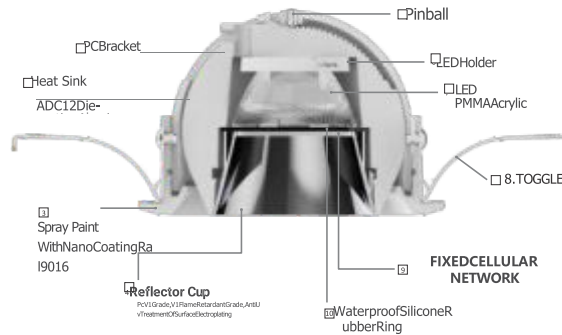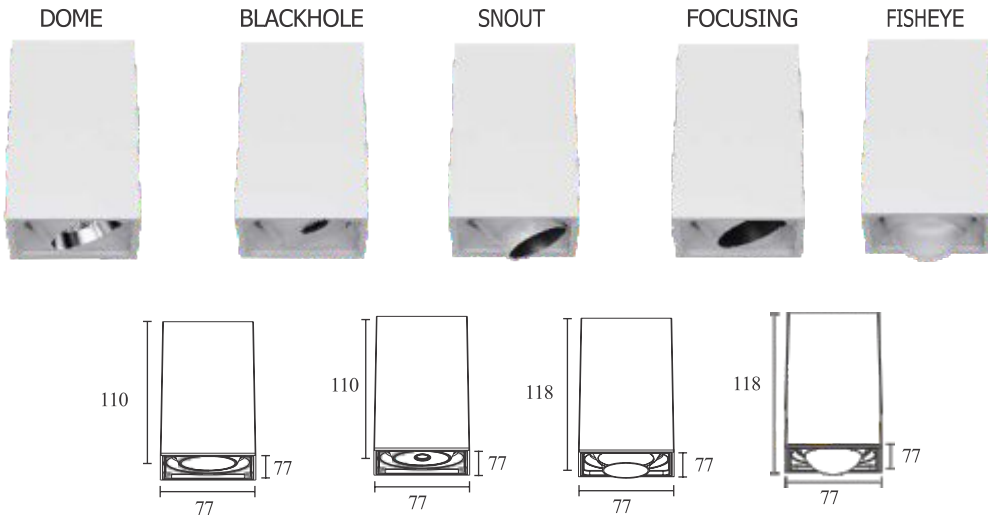

RF 2.4G



TRICOLOUR WITH RF + BT + WIFI DIMMING AVAILABLE




JAZZ SPOTLIGHT



WATTAGE	5-8W	10-12W	15-18W	18-22W	25-35W	40-50W
DIAMETER	62MM	85MM	105MM	130MM	170MM	195MM
HEIGHT	59MM	64MM	72MM	73MM	80MM	85MM
CUTOUT	55MM	75MM	95MM	115MM	145MM	170MM

LED BRIDGELUX/CREE
DRIVER PHILIPS/FULHAM/OSRAM
COLOUR TEMP 2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY 120-140 LM / W
LENS HERCULUX
LEDBEAMANGLE 24°/36°/55°
RING COLOUR WHITE/MATTBLACK/SHININGBLACK/CHROME/ROSEGOLD/GOLD BODY
COLOUR BLACK / WHITE
MATERIAL ALUMINUMDIECASTING



HoneycombMesh
Availableforallsize

JAZZ TRIMLESS



WATTAGE	10-12W
DIAMETER	110MM
HEIGHT	64MM
CUTOUT	75MM


LED BRIDGELUX/CREE
DRIVER PHILIPS/FULHAM/OSRAM
COLOUR TEMP 2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY 120-140 LM / W
LEDBEAMANGLE 24°/36°/55°
RINGCOLOUR WHITE/MATTBLACK/SHININGBLACK/CHROME/ROSEGOLD/GOLD
BODYCOLOUR WHITE
MATERIAL ALUMINUMDIECASTING

JAZZ WALL WASHER



WATTAGE	10-12W
DIAMETER	85MM
HEIGHT	64MM
CUTOUT	75MM

(AVAILABLEINCHROME/SHININGBLACK)



HoneycombMesh
Availableforallsize



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



PHANTOM IP65 DEEP



WATTAGE	3-7W	10-12W	15-18W
DIAMETER	65MM	85MM	105MM
HEIGHT	72MM	79MM	94MM
CUTOUT	55MM	75MM	95MM

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	24°/36°/60°
RINGCOLOUR	WHITE/BLACK/GUNBLACK/CHORME/BRASS ROSEGOLD
BODYCOLOUR	GREY
MATERIAL	RING-CNCMACHINING/HEATSINK-DIECASTING

PHANTOM IP65 CURVE



WATTAGE	3-7W	10-12W	15-18W
DIAMETER	65MM	85MM	105MM
HEIGHT	52MM	56MM	68MM
CUTOUT	55MM	75MM	95MM

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	24°/36°/60°
RINGCOLOUR	WHITE/BLACK/GUNBLACK/CHORME/BRASS ROSEGOLD
BODYCOLOUR	GREY
MATERIAL	RING-CNCMACHINING/HEATSINK-DIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



AQUA IP65



WATTAGE	7-12W	12-18W	20-30W	36-50W	55-80W
DIAMETER	85MM	110MM	135MM	180MM	242MM
HEIGHT	70MM	78MM	91MM	106MM	140MM
CUTOUT	75MM	95MM	125MM	155MM	220MM

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LENS	HERCULUX
LEDBEAMANGLE	24°/45°/55°
RING COLOUR	WHITE / MATT BLACK / SHINING BLACK / CHROME
BODY COLOUR	BLACK / WHITE
MATERIAL	ALUMINUMDIECASTING



HoneycombMesh
Availableforallsize

SWIFT IP44 (HONEYCOMB)



WATTAGE	6-10W	10-15W	15-20W
DIAMETER	85mm	100mm	125mm
HEIGHT	50mm	60mm	65mm
CUTOUT	75mm	95mm	120mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOURTEMP	2700K/3000K/3500K/4000K/5000K/ 6500K
BEAMANGLE	40°
LUMENEFFICIENCY	120-140LM/W
RINGCOLOUR	WHITE/MATTBLACK/SHININGBLACK/ CHROME /ROSE GOLD
HEATSINK COLOUR	BLACK /
WHITEMATERIAL	ALUMINUM DIE CASTING




HONEYCOMB



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



OLIVE SPOTLIGHT



WATTAGE	3-7W	10-12W	15-18W
DIAMETER	40MM	60MM	72MM
HEIGHT	72MM	72MM	95MM
CUTOUT	35MM	55MM	65MM


LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	24°
BODYCOLOUR	WHITEWITHBRASS/BRASS/ GUNBLACK/CHROME
MATERIAL	CNCMACHINING

BELLA SPOTLIGHT



WATTAGE	3W	6W	10W
DIAMETER	30MM	40MM	50MM
HEIGHT	60MM	80MM	100MM
CUTOUT	25MM	35MM	45MM

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	24°
RINGCOLOUR	WHITE/BLACK
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING




BELLA TRIMLESS SPOTLIGHT



WATTAGE	3W	6W	10W
DIAMETER	53MM	65MM	79MM
HEIGHT	60MM	80MM	100MM
CUTOUT	25MM	35MM	45MM

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	24°
RINGCOLOUR	WHITE/BLACK
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING

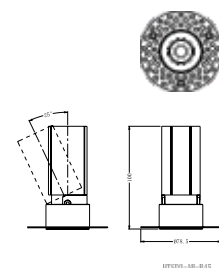

RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



HTS20-10-015

MINI SPOTLIGHT



WATTAGE	3-5W	7-9W	10-12W	15W
DIAMETER	62MM	72MM	83MM	105MM
HEIGHT	25MM	28MM	31MM	35MM
CUTOUT	55MM	65MM	75MM	95MM

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	24°
RINGCOLOUR	WHITE/BLACK
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING



SUN FLOWER



WATTAGE	6-8W	12-15W	15-20W
DIAMETER	70mm	85mm	95mm
HEIGHT	50mm	65mm	75mm
CUTOUT	65mm	75mm	90mm


LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOURTEMP	2700K/3000K/3500K/4000K/5000K/ 6500KLUMEN
EFFICIENCY	120-140LM/W
LED BEAM ANGLE	36°
RINGCOLOUR	WHITE/SHININGBLACK/ROSEGOLD/ CHROME / GOLD
HEATSINK COLOUR	BLACK /
WHITEMATERIAL	ALUMINUM DIE CASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



POLO PIN HOLE LIGHT



WATTAGE	5W	8W	10W	12W
DIAMETER	65MM	75MM	85MM	105MM
HEIGHT	51MM	59MM	59MM	62MM
CUTOUT	55MM	65MM	75MM	95MM


LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	24°/36°
RINGCOLOUR	WHITE/BLACK
MATERIAL	ALUMINUMDIECASTING

CHAMP TILTABLE SPOTLIGHT



WATTAGE	3-7W	10-12W	15-18W
DIAMETER	62MM	82MM	105MM
HEIGHT	43MM	48MM	49MM
CUTOUT	55MM	75MM	95MM

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	36°
RINGCOLOUR	WHITE/BLACK/SHININGBLACK/CHROME/ ROSEGOLD
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING



HoneycombMesh
Availableforallsize

EXTRA DEEP CONE



WATTAGE	7W	12W	18W
DIAMETER	61MM	81MM	101MM
HEIGHT	62MM	78MM	90MM
CUTOUT	55MM	75MM	95MM

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	36°
RINGCOLOUR	WHITE/BLACK(12W)
MATERIAL	ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



ASTRO PULLOUT



WATTAGE	3W	8W
DIAMETER	62mm	62mm
HEIGHT	252mm	252mm
CUTOUT	55mm	55mm

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LEDBEAMANGLE	24°
RINGCOLOUR	BLACK
BODYCOLOUR	BLACK /WHITE

PULLOUT SINGLE



WATTAGE	8W	10W	12W
DIAMETER	72mm	85mm	98mm
HEIGHT	100mm	110mm	120mm
CUTOUT	65mm	75mm	100mm

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOURTEMP	2700K/3000K/3500k/4000K/5000k/ 6500KLUMEN
EFFICIENCY	120-140LM/W
REFLECTOR	GR/SHINLAND
LEDBEAMANGLE	38°
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING

PULLOUT DOUBLE



WATTAGE	7X2W	12X2W
DIAMETER	135X72mm	185X98mm
HEIGHT	100mm	120mm
CUTOUT	65X125mm	175X90mm

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500k/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
REFLECTOR	GR/SHINLAND
LEDBEAMANGLE	38°
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



KUNGFU SURFACE

Shape colorful creative
Shaping creative fashion space



MODEL	2HEAD	3HEAD	4HEAD	5HEAD	6HEAD
WATTAGE	7W	7W	7W	7W	7W
HEIGHT	200mm	300mm	400mm	500mm	600mm
DIAMETER	30mm	30mm	30mm	30mm	30mm

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LED BEAM ANGLE	12° To 58° Strech Zoom
RING COLOUR	BLACK/WHITE/CHROME
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING

KUNGFU PULLOUT



MODEL	2HEAD	3HEAD	4HEAD	5HEAD	6HEAD
WATTAGE	7W	7W	7W	7W	7W
HEIGHT	200mm	300mm	400mm	500mm	600mm
DIAMETER	85mm	85mm	85mm	85mm	85mm
CUTOUT	75mm	75mm	75mm	75mm	75mm

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LED BEAM ANGLE	12° To 58° Strech Zoom
RING COLOUR	BLACK/WHITE/CHROME
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING

KUNGFU DOUBLE PULLOUT



MODEL	2HEAD	3HEAD	4HEAD	5HEAD	6HEAD
WATTAGE	7W	7W	7W	7W	7W
PIPEHEIGHT	200mm	300mm	400mm	500mm	600mm
DIA	155mmX85mm	155mmX85mm	155mmX85mm	155mmX85mm	155mmX85mm
CUTOUT	145mmX75mm	145mmX75mm	145mmX75 mm	145mmX75mm	145mmX75mm

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LED BEAM ANGLE	12° To 58° Strech Zoom
RING COLOUR	BLACK/WHITE/CHROME
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



KUNGFU PULLOUT TRIMLESS



MODEL	2HEAD	3HEAD	4HEAD	5HEAD	6HEAD
WATTAGE	7W	7W	7W	7W	7W
HEIGHT	200mm	300mm	400mm	500mm	600mm
DIAMETER	100mm	100mm	100mm	100mm	100mm
CUTOUT	70mm	70mm	70mm	70mm	70mm

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LED BEAM ANGLE	12° To 58° Strech Zoom
RING COLOUR	BLACK/WHITE/CHROME
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING

KUNGFU TRACKLIGHT



MODEL	2HEAD	3HEAD	4HEAD	5HEAD	6HEAD
WATTAGE	7W	7W	7W	7W	7W
HEIGHT	200mm	300mm	400mm	500mm	600mm
DIAMETER	30mm	30mm	30mm	30mm	30mm

LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LED BEAM ANGLE	12° To 58° Strech Zoom
RING COLOUR	BLACK/WHITE/CHROME
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING

KUNGFU SURFACE CYLINDER



MODEL	2HEAD	3HEAD	4HEAD	5HEAD	6HEAD
WATTAGE	7W	7W	7W	7W	7W
PIPEHEIGHT	200mm	300mm	400mm	500mm	600mm
PIPE DIA	30mm	30mm	30mm	30mm	30mm
SURFACEHEIGHT	110mm	110mm	110mm	110mm	110mm
SURFACE DIA	75mm	75mm	75mm	75mm	75mm


LED	BRIDGELUX/CREE
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
LED BEAM ANGLE	12° To 58° Strech Zoom
RING COLOUR	BLACK/WHITE/CHROME
BODYCOLOUR	BLACK /WHITE
MATERIAL	ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



DELTA SPOTLIGHT



MODEL	CHD7	CHD12	CHD18
WATTAGE	7W	12W	18W
SIZE	69X70mm	83X80mm	100X95mm
CUTOUTSIZE	65mm	75mm	85mm

BODYCOVERCOLOUR

WHITE/GREY/GOLDEN/ROSEGOLD/ CHROME / SHINING BLACK ETC.

BODYCOLOUR

WHITE/BLACK

HEATSINKCOLOUR

GREY

DEEP CONE SPOTLIGHT



MODEL	CHC7	CHC12	CHC18
WATTAGE	6W	12W	18W
SIZE	40X55mm	59X82mm	75X100mm
CUTOUTSIZE	35mm	55mm	67mm

BODYCOVERCOLOUR

White/Black/Grey/ElectroplatingRoseGold/ White Gold / White Grey

HEATSINKCOLOUR

BlackOxide/PaintingGray

SPECIFICATIONS


LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
REFLECTOR	SHINLAND/INDIAN
LUMENEFFICIENCY	120-140LM/W
LED BEAM ANGLE	24°/36°/60°(DELTA)
MATERIAL	ALUMINUM DIE CASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



FB VALUE SPOTLIGHT



WATTAGE	3W	7W	12W	18W
DIAMETER	46mm	75mm	85mm	95mm
HEIGHT	44mm	65mm	74mm	93mm
CUTOUT	39mm	65mm	75mm	85mm


LED CREE/BRIDGELUX
 DRIVER PHILIPS / FULHAM / OSRAM
 COLOURTEMP 2700K / 3000K / 4000K / 6500K
 REFLECTOR SHINLAND / INDIAN
 SHINLANDLENS 7W/12W-40°
 LUMENEFFICIENCY 120-140LM/W
 LED BEAM ANGLE 15°/24°/36°/60°
 RING COLOUR WHITE/BLACK/GREY
 HEATSINK COLOUR BLACK
 MATERIAL ALUMINUMDIECASTING

FB CURVE SPOTLIGHT



WATTAGE	3W	7W	12W	18W
DIAMETER	46mm	75mm	85mm	95mm
HEIGHT	44mm	57mm	65mm	82mm
CUTOUT	39mm	65mm	75mm	85mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 2700K/3000K/4000K/6500K
 REFLECTOR SHINLAND/INDIAN
 SHINLAND LENS 7W / 12W - 40°
 LUMEN EFFICIENCY 120-140 LM / W
 LED BEAM ANGLE 15°/24°/36°/60°
 RING COLOUR WHITE/BLACK/GREY
 HEATSINK COLOUR BLACK
 MATERIAL ALUMINUMDIECASTING



HoneycombMesh
 Availableforallsize

FB EXTRA DEEP CONE SPOTLIGHT



MODELNO	EXTRA3	EXTRA6
WATTAGE	3W	6W
DIAMETER	40mm	40mm
HEIGHT	60mm	60mm
CUTOUT	38mm	38mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 REFLECTOR INDIAN
 COLOUR TEMP 2700K/3000K/4000K/6500K
 LUMEN EFFICIENCY 120 - 140LM / W
 LEDBEAMANGLE 40°
 RING COLOUR WHITE/BLACK/GREY
 HEATSINK COLOUR BLACK
 MATERIAL ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



DELTA PRO



WATTAGE	12W	15W
DIAMETER	84mm	84mm
HEIGHT	76mm	76mm
CUTOUT	75mm	75mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
REFLECTOR	SHINLAND/INDIAN
SHINLAND LENS	12W - 40°
LUMEN EFFICIENCY	120-140LM/W
LEDBEAMANGLE	15°/24°/36°/60°
SHINLANDRINGCOLOUR	SHININGBLACK/ROSEGOLD GOLD / CHROME
MATERIAL	ALUMINUMDIECASTING

FB DELTA SPOTLIGHT



MODELNO	DELTA7	DELTA12	DELTA18
WATTAGE	6-8W	10-12W	15-18W
DIAMETER	74mm	84mm	100mm
HEIGHT	65mm	76mm	94mm
CUTOUT	65mm	75mm	88mm


LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/4000K/6500K
REFLECTOR	SHINLAND/INDIAN
SHINLAND LENS	7W / 12W - 40°
LUMEN EFFICIENCY	120-140 LM / W
LED BEAM ANGLE	15°/24°/36°/60°
RINGCOLOUR	WHITE/BLACK/GLOSSYSHININGBLACK/ ARMYGREEN/CHOCOLATE/GREY
HEATSINK COLOUR	BLACK
MATERIAL	ALUMINUMDIECASTING





RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



FB SQUARE SPOTLIGHT

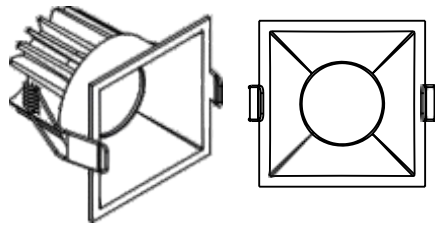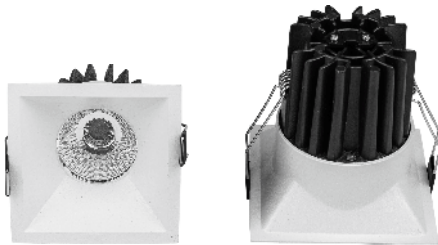


WATTAGE
DIAMETER
HEIGHT
CUTOUT

7W	12W	18W
74mm	84mm	94mm
61mm	68mm	81mm
54mm	63mm	68mm

LED CREE/BRIDGELUX
DRIVER PHILIPS/FULHAM/OSRAM
COLOUR TEMP 2700K/3000K/4000K/6500K
REFLECTOR SHINLAND/INDIAN
SHINLAND LENS 7W / 12W - 40°
LUMEN EFFICIENCY 120-140 LM / W
LED BEAM ANGLE 15°/24°/36°/60°
RING COLOUR WHITE/BLACK/GREY
HEATSINK COLOUR BLACK
MATERIAL ALUMINUMDIECASTING

FB FLAT SPOTLIGHT



WATTAGE
DIAMETER
HEIGHT
CUTOUT

7W	12W	18W
63mm	74mm	77mm
44mm	52mm	63mm
52mm	63mm	66mm


LED CREE/BRIDGELUX
DRIVER PHILIPS/FULHAM/OSRAM
COLOUR TEMP 2700K/3000K/4000K/6500K
REFLECTOR SHINLAND/INDIAN
SHINLAND LENS 7W / 12W - 40°
LUMEN EFFICIENCY 120-140 LM / W
LED BEAM ANGLE 15°/24°/36°/60°
RING COLOUR WHITE/BLACK/GREY
HEATSINK COLOUR BLACK
MATERIAL ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



FB TRIMLESS SPOTLIGHT



WATTAGE	12W	15W
DIAMETER	82mm	82mm
HEIGHT	83mm	83mm
CUTOUT	82mm	82mm
LED	CREE/BRIDGELUX	
DRIVER	PHILIPS/FULHAM/OSRAM	
COLOUR TEMP	2700K/3000K/4000K/6500K	
REFLECTOR	SHINLAND / INDIAN	
SHINLAND LENS	12W - 40°	
LUMEN EFFICIENCY	120-140LM/W	
LED BEAM ANGLE	15° / 24° / 36° / 60°	
RING COLOUR	WHITE/BLACK/GREY	
HEATSINK COLOUR	GREY/BLACK MATERIAL	
	ALUMINUMDIECASTING	

FB PLUTO SPOTLIGHT



WATTAGE	7W	12W	18W
DIAMETER	64mm	87mm	100mm
HEIGHT	51mm	72mm	80mm
CUTOUT	55mm	75mm	95mm
LED	CREE/BRIDGELUX		
DRIVER	PHILIPS/FULHAM/OSRAM		
COLOUR TEMP	2700K/3000K/4000K/6500K		
REFLECTOR	GR / INDIAN		
LUMEN EFFICIENCY	120-140 LM / W		
LED BEAM ANGLE	15°/24°/36°/60°		
RING COLOUR	CHROME/SHININGBLACK/GOLD/ROSEGOLD		
HEATSINK COLOUR	GREY/BLACK		
MATERIAL	ALUMINUMDIECASTING		

FB WALL WASHER SPOTLIGHT




WATTAGE	12W	15W
DIAMETER	85mm	85mm
HEIGHT	74mm	74mm
CUTOUT	75mm	75mm
LED	CREE/BRIDGELUX	
DRIVER	PHILIPS/FULHAM/OSRAM	
COLOUR TEMP	2700K/3000K/4000K/6500K	
REFLECTOR	SHINLAND / INDIAN	
SHINLAND LENS	7W/12W-40°	
LUMEN EFFICIENCY	120-140LM/W	
RING COLOUR	CHROME	
HEATSINK COLOUR	BLACK	
MATERIAL	ALUMINUMDIECASTING	



RF 2.4G 

TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



RIO FIX DOWNLIGHT



RIOFIXDOWNLIGHT

MODELNO	RIO20	RIO30	RIO40
WATTAGE	15-22W	25-30W	36-40W
DIAMETER	106mm	114mm	118MM
HEIGHT	88mm	90mm	105MM
CUTOUT	96mm	104mm	110MM

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
REFLECTOR	DARKOO/INDIAN
LED BEAM ANGLE	24° / 36° / 60°
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120 - 140 LM / W
BODYCOLOUR	WHITE/BLACK
MATERIAL	ALUMINUMDIECASTING

MASH FIX DOWNLIGHT



MASHFIXDOWNLIGHT

MODELNO	FIX7	FIX10	FIX20	FIX30	FIX40	FIX50
WATTAGE	6-8W	10-12W	15-22W	25-30W	36-40W	40-50W
DIAMETER	70mm	80mm	120mm	159mm	185MM	185MM
HEIGHT	70mm	74mm	106mm	120mm	127MM	127MM
CUTOUT	60mm	70mm	108mm	145mm	170MM	170MM


LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
REFLECTOR	DARKOO/INDIAN
LED BEAM ANGLE	24° / 36° / 60°
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120 - 140 LM / W
BODYCOLOUR	WHITE/BLACK
MATERIAL	ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



MASH MOVEABLE DOWNLIGHT



MASHMOVEABLEDOWNLIGHT

MODELNO	MASH3	MASH8	MASH10	MASH12	MASH20	MASH30	MASH40	MASH50
WATTAGE	3-4W	6-8W	10-12W	12-15W	15-20W	22-30W	36-40W	40-50W
DIAMETER	56mm	74mm	81mm	89mm	114mm	137mm	155mm	155mm
HEIGHT	38mm	55mm	54mm	55mm	79mm	79mm	84mm	84mm
CUTOUT	48mm	64mm	70mm	79mm	104mm	125mm	145mm	145mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 REFLECTOR DARKOO/INDIAN
 COLOUR TEMP 2700K/3000K/4000K/6500K
 LUMEN EFFICIENCY 120 - 140 LM / W
 LED BEAM ANGLE 24° / 36° / 60°
 MATERIAL ALUMINUM DIE CASTING



MASH DEEP MOVEABLE DOWNLIGHT



MODELNO	MDEEP3	MDEEP7	MDEEP12	MDEEP20
WATTAGE	3-4W	6-8W	10-12W	15-22W
DIAMETER	58mm	90mm	103mm	138mm
HEIGHT	54mm	75mm	78mm	111mm
CUTOUT	48mm	80mm	93mm	125mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 REFLECTOR DARKOO/INDIAN
 COLOUR TEMP 2700K/3000K/4000K/6500K
 LUMEN EFFICIENCY 120 - 140LM / W
 LED BEAM ANGLE 24° / 36° / 60°
 MATERIAL ALUMINUM DIE CASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



MOVEABLE DOWNLIGHT



ROUND MOVEABLE DOWNLIGHT

MODEL NO	MO3	MO8	MO12	MO18	MO30	MO40	MO50
WATTAGE	3-4W	6-8W	10-12W	15-20W	22-30W	36-40W	40-50W
DIAMETER	70mm	102mm	102mm	125mm	148mm	170mm	170mm
HEIGHT	40mm	58mm	70mm	70mm	85mm	85mm	85mm
CUTOUT	62mm	86mm	86mm	110mm	132mm	154mm	154mm

SQUARE MOVEABLE DOWNLIGHT

MODEL NO	MO3	MO8	MO12	MO18	MO30	MO40	MO50
WATTAGE	3-4W	6-8W	10-12W	15-20W	22-30W	36-40W	40-50W
WXL	62mm	102mm	102mm	125mm	148mm	170mm	170mm
HEIGHT	40mm	58mm	70mm	70mm	85mm	85mm	85mm
CUTOUT	55X55MM	86X86MM	86X86MM	110X110MM	132X132MM	154X154MM	154X154MM


LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
REFLECTOR	DARKOO/INDIAN
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120 - 140 LM / W
LED BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUM DIE CASTING

FB MOVEABLE DOWNLIGHT




MODEL NO	FB15	FB20	FB 25	FB 30
WATTAGE	15W	20W	25W	30W
DIAMETER	124mm	124mm	130mm	130mm
HEIGHT	78mm	78mm	93mm	93mm
CUTOUT	110mm	110mm	116mm	116mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
REFLECTOR	DARKOO/INDIAN
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	120 - 140LM / W
LED BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUM DIE CASTING



RF 2.4G

TRICOLOUR WITH RF+BT+WIFI DIMMING AVAILABLE



MAZE MODULE (MR16)




WATTAGE 3-7W
LED CREE/BRIDGELUX
DRIVER PHILIPS/FULHAM/OSRAM
HEIGHT 53mm
COLOURTEMP2700K/3000K/4000K/6500K
REFLECTOR SHINLAND / INDIAN / LENS
BEAMANGLE 15 / 24 / 40/ 60

WATTAGE 10-12W
LED CREE/BRIDGELUX
DRIVER PHILIPS/FULHAM/OSRAM
HEIGHT 63mm
COLOURTEMP2700K/3000K/4000K/6500K
REFLECTOR SHINLAND / INDIAN / LENS
BEAMANGLE 15 / 24 / 40/ 60

WATTAGE 15W
LED CREE/BRIDGELUX
DRIVER PHILIPS/FULHAM/OSRAM
HEIGHT 78mm
COLOURTEMP2700K/3000K/4000K/6500K
REFLECTOR SHINLAND / INDIAN / LENS
BEAMANGLE 15 / 24 / 40/ 60

FB 12WX3 GIMBAL DOWNLIGHT

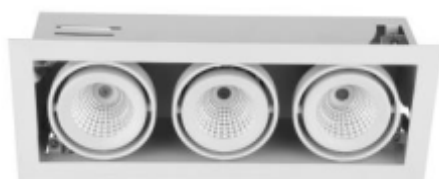


FBTRIPPLEGIMBAL

	FBX18	FBX36
MODELNO	FBX18	FBX36
WATTAGE	6+6+6W	12+12+12W
CUTOUT	103X288mm	103X288mm
DIAMETER	120X313mm	120X313mm
HEIGHT	77mm	77mm

LED CREE/BRIDGELUX
DRIVER PHILIPS/FULHAM/OSRAM
REFLECTOR DARKOO/INDIAN
COLOUR TEMP 2700K/3000K/4000K/6500K
LUMEN EFFICIENCY 120 - 140 LM / W
LED BEAM ANGLE 24°/36°/60°
BODYCOLOUR WHITE/BLACK



RF 2.4G 



FB 25/30 GIMBAL DOWNLIGHT



FBSINGLEGIMBAL


MODELNO	FB25	FB30
WATTAGE	25W	30W
DIAMETER	136mm	136mm
HEIGHT	100mm	100mm
CUTOUT	125X125mm	125X125mm

FBDOUBLEGIMBAL

MODELNO	FB50	FB60
WATTAGE	25+25W	30+30W
DIAMETER	136X259mm	136X259mm
HEIGHT	100mm	100mm
CUTOUT	125X238mm	125X238mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 REFLECTOR DARKOO/INDIAN
 COLOUR TEMP 2700K/3000K/4000K/6500K
 LUMEN EFFICIENCY 120 - 140 LM / W
 LED BEAM ANGLE 24°/36°/60°
 BODYCOLOUR WHITE/BLACK

FB 30X3 GIMBAL DOWNLIGHT

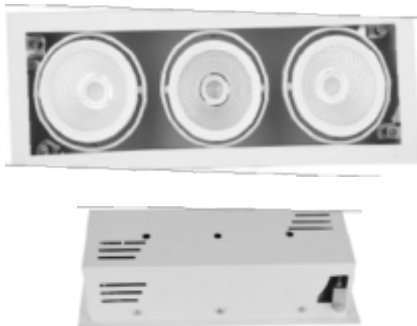

FBTRIPLEGIMBAL

MODELNO	FB75	FB90
WATTAGE	25+25+25W	30+30+30W
DIAMETER	374X136mm	374X136mm
HEIGHT	100mm	100mm
CUTOUT	353X125mm	353X125mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 REFLECTOR DARKOO/INDIAN
 COLOUR TEMP 2700K/3000K/4000K/6500K
 LUMEN EFFICIENCY 120 - 140 LM / W
 LED BEAM ANGLE 24°/36°/60°
 BODYCOLOUR WHITE/BLACK


FB 30X4 GIMBAL DOWNLIGHT



FBFOURGIMBAL

MODELNO	FB100	FB120
WATTAGE	25+25+25+25W	30+30+30+30W
DIAMETER	295X295mm	295X295mm
HEIGHT	115mm	115mm
CUTOUT	274X274mm	274X274mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 REFLECTOR DARKOO / INDIAN
 COLOUR TEMP 2700K/3000K/4000K/6500K
 LUMEN EFFICIENCY 120-140LM/W
 LED BEAM ANGLE 24°/36°/60°
 BODY COLOUR WHITE/BLACK



RF 2.4G

TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE

GB 25/30 GIMBAL DOWNLIGHT



MODELNO	GB25	GB30
WATTAGE	25W	30W
DIAMETER	180x180mm	180x180mm
HEIGHT	96mm	96mm
CUTOUT	156X156mm	156X156mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
REFLECTOR	DARKOO
COLOURTEMP	2700K/3000K/4000K/6500K
LUMENEFFICIENCY	130LM/W LED
BEAM ANGLE	24°/36°/60°

MODELNO	GB50	GB60
WATTAGE	25+ 25W	30+ 30W
DIAMETER	332X180mm	332X180mm
HEIGHT	98mm	98mm
CUTOUT	156X309mm	156X309mm


LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
REFLECTOR	DARKOO/INDIAN
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMENEFFICIENCY	120-140LM/W
LEDBEAMANGLE	24°/36°/60°
BODYCOLOUR	WHITE/BLACK

DUKE GIMBAL

WATTAGE	7W	7X2W	7X3W	7X4W
W X L	65X65MM	65X126MM	65X187MM	126X126MM
HEIGHT	52MM	52MM	52MM	52MM
CUTOUT	55X55MM	55X115MM	55X175MM	115X115MM

WATTAGE	12W	12X2W	12X3W	12X4W	20W	20X2W
W X L	85X85MM	85X167MM	85X252MM	165X165MM	105X105MM	105X208MM
HEIGHT	63MM	63MM	63MM	63MM	77MM	77MM
CUTOUT	75X75MM	75X160MM	75X240MM	150X150MM	95X95MM	95X195MM

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
REFLECTOR	GR
LEDBEAMANGLE	24°/40°/60°
COLOURTEMP	2700K/3000K/4000K/6500K
LUMENEFFICIENCY	130LM/W
BODY COLOUR	WHITE/BLACK
RING COLOUR	BLACK

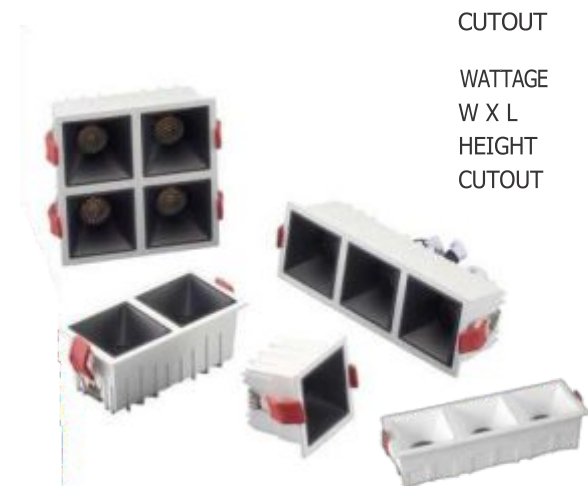

RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE




ZOOM LIGHT



MODELNO	ZOOM10	ZOOM20	ZOOM30	ZOOM40
WATTAGE	6-10W	15-25W	25-30W	32-40W
DIAMETER	97mm	132mm	145mm	165mm
HEIGHT	80mm	110mm	113mm	123mm
CUTOUT	90mm	125mm	136mm	145mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 REFLECTOR DARKOO/INDIAN
 COLOUR TEMP 2700K/3000K/4000K/6500K
 LED BEAM ANGLE 24°/ 36° / 60°
 BODY COLOUR WHITE/BLACK
 LUMEN EFFICIENCY 120-140LM/W
 CRI >80
 INGRESSPROTECTIONIP20

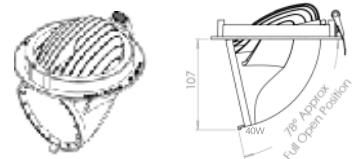

ZOOM GIMBAL



ZOOMSINGLEGIMBAL

WATTAGE	25W	30W
DIAMETER	140mm	140mm
HEIGHT	110mm	110mm
CUTOUT	132mm	132mm

ZOOMDOUBLEGIMBAL

WATTAGE	25+25W	30+30W
DIAMETER	140X280MM	140X280MM
HEIGHT	110mm	110mm
CUTOUT	260X132mm	260X132mm




LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 2700K/3000K/4000K/6500K
 REFLECTOR DARKOO / INDIAN
 LUMEN EFFICIENCY 120-140LM/W
 LED BEAM ANGLE 24° / 36° / 60°
 BODY COLOUR WHITE/BLACK
 MATERIAL ALUMINUMDIECASTING




RF 2.4G 

TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



MOON SURFACE PANEL

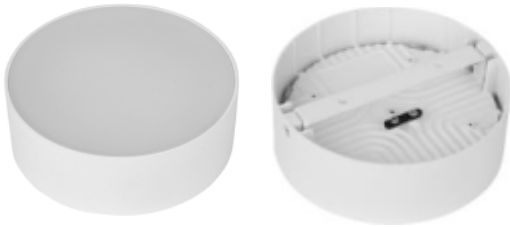

WATTAGE	12W	15W	18W	22W	24-28W
DIAMETER	140mm	140mm	140mm	140mm	140mm
HEIGHT	50mm	50mm	50mm	50mm	50mm

LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM LED
 COLOUR 3000K/4000K/5000K/6500K
 BODY COLOUR WHITE / BLACK
 LUMENEFFICIENCY 100LM/W
 MATERIAL ALUMINUMDIECASTING

SMD SURFACE DOWNLIGHT



WATTAGE	6W	12W	15W	18W
DIAMETER	80mm	90mm	100mm	120mm
HEIGHT	65mm	65mm	60mm	60mm

LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM LED
 COLOUR 3000K/4000K/5000K/6500K
 BODY COLOUR WHITE / BLACK
 LUMENEFFICIENCY 100LM/W
 MATERIAL ALUMINUMDIECASTING

DEEP DOWNLIGHT PANEL



MODELNO	DDLRO12	DDLRO18	DDLRO22
WATTAGE	12W	18W	22W
DIAMETER	120mm	148mm	170mm
HEIGHT	52mm	52.5mm	52.8mm
CUT OUT	110mm	138mm	160mm

MODELNO	DDLSQ12	DDLSQ18	DDLSQ22
WATTAGE	12W	18W	22W
DIAMETER	110X110mm	143X143mm	165X165mm
CUT OUT	100X100mm	133X133mm	155X155mm


LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM LED
 COLOUR 3000K/4000K/5000K/6500K
 BODY COLOUR WHITE / BLACK
 LUMENEFFICIENCY 100LM/W
 MATERIAL ALUMINUMDIECASTING





RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



SQUARE PANEL LIGHTS


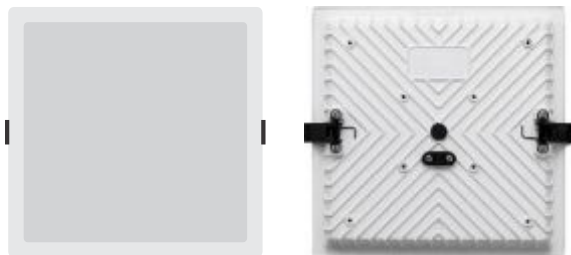


MODELNO
WATTAGE
DIAMETER
CUTOUT

MODELNO	SQ8	SQ12	SQ18	SQ24
WATTAGE	8W	12W	18W	24W
DIAMETER	120mm	145mm	170mm	195mm
CUTOUT	100X100mm	125X125mm	150X150mm	175X175mm

LED DRIVER COLOUR BODY COLOUR LUMENEFFICIENCY MATERIAL
BRIDGELUX PHILIPS/FULHAM/OSRAM LED 3000K/4000K/5000K/6500K WHITE / BLACK 100LM/W ALUMINUMDIECASTING

ROUND PANEL LIGHTS

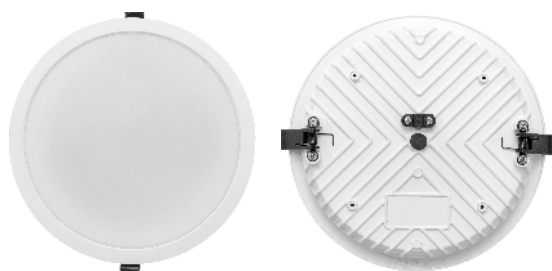

MODELNO
WATTAGE
DIAMETER
CUTOUT

MODELNO	RO8	RO12	RO18	RO24
WATTAGE	8W	12W	18W	24W
DIAMETER	120mm	145mm	170mm	195mm
CUTOUT	100mm	125mm	150mm	175mm

LED DRIVER COLOUR BODY COLOUR LUMENEFFICIENCY MATERIAL
BRIDGELUX PHILIPS/FULHAM/OSRAM LED 3000K/4000K/5000K/6500K WHITE / BLACK 100LM/W ALUMINUMDIECASTING

RO BIG SURFACE PANEL LIGHTS



WATTAGE
DIAMETER
HEIGHT

WATTAGE	8W	12W	18W	24W
DIAMETER	107mm	133mm	158mm	184mm
HEIGHT	67mm	67mm	67mm	67mm


LED DRIVER OSRAMLED COLOUR BODY COLOUR LUMENEFFICIENCY MATERIAL
BRIDGELUX PHILIPS / FULHAM / 3000K/4000K/5000K/6500K WHITE / BLACK 100LM/W ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



TILTABLE TRACKLIGHT

WATTAGE	30W	40W
DIAMETER	80MM	100MM
HEIGHT	185MM	200MM

BODYCOLOUR	WHITE/BLACK
LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3/4WIRE
COLOURTEMP	2700/3000K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
REFLECTOR	DARKOO/INDIANLED
BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUMDIECASTING



NOVA TRACKLIGHT



WATTAGE	30W	40W
DIAMETER	80MM	100MM
HEIGHT	125MM	125MM

BODYCOLOUR	WHITE/BLACK
LED	CREE /
DRIVER	BRIDGELUXPHILIPS/FULHA
CHANNEL	M/OSRAM
	2/3/4WIRE
COLOUR TEMP	2700/3000K/4000K/5000K/6500K
LUMENEFFICIENCY	120-140 LM / W
REFLECTOR	DARKOO/INDIAN
LED BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUMDIECASTING

JUPITER TRACKLIGHT

WATTAGE	25W	30W
DIAMETER	80MM	100MM
HEIGHT	125MM	125MM

BODYCOLOUR	WHITE/BLACK
LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3/4WIRE
COLOURTEMP	2700/3000K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
REFLECTOR	DARKOO/INDIANLED
BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE

2022 TRACKLIGHT

WATTAGE	6-10W	15-20W	25-30W
DIAMETER	50mm	60mm	80mm
HEIGHT	135mm	150mm	180mm

WATTAGE	30-40W	40-50W
DIAMETER	80mm	100mm
HEIGHT	195mm	190mm



LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3/4WIRE
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	130 LM / W
BODY COLOUR	WHITE / BLACK
REFLECTOR	DARKOO/INDIAN
LED BEAM ANGLE	24° / 36° / 60°

2022 PRO TRACKLIGHT



WATTAGE	12-18W	25-30W
DIAMETER	60MM	80MM
HEIGHT	150MM	180MM

BODY COLOUR	WHITE/BLACK/ROSE-GOLD
LED	CREE / BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3/4WIRE
COLOURTEMP	2700/3000K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
REFLECTOR	DARKOO/INDIANLED
BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUMDIECASTING

2022 CRADLE TRACKLIGHT

WATTAGE	20-30W	40W	40W	50W
DIAMETER	90MM	90MM	100MM	100MM
HEIGHT	175MM	200MM	190MM	200MM

BODYCOLOUR	WHITE/BLACK
LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3/4WIRE
COLOURTEMP	2700/3000K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
REFLECTOR	DARKOO/INDIANLED
BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



FB TRACK



WATTAGE	20W/30W/40W
BODYCOLOUR	WHITE/BLACK
LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3WIRE
COLOURTEMP	2700/3000K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
REFLECTOR	DARKOO/INDIAN
LED BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUMDIECASTING

FB TRACK WITH ARM



WATTAGE	20W/30W/40W
BODYCOLOUR	WHITE/BLACK
LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3WIRE
COLOURTEMP	2700/3000K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
REFLECTOR	DARKOO/INDIANLED
BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUMDIECASTING

2022 TRACK LIGHT COLOURRING



WATTAGE	25-30W
DIAMETER	80MM
HEIGHT	180MM
RINGCOLOUR	WHITE/SHININGBLACK/ROSEGOLD/CHROME
BODY COLOUR	WHITE/BLACK
LEDMAKE	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3/4WIRE
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	130 LM / W
LEDBEAMANGLE	36°



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE

GLORIA TRACKLIGHT



WATTAGE	15-24W
DIAMETER	70MM
HEIGHT	150MM
RINGCOLOUR	WHITE/SHININGBLACK/ROSEGOLD/CHROME
BODY COLOUR	WHITE/BLACK
LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3/4WIRE
COLOUR TEMP	2700K/3000K/4000K/6500K
LUMEN EFFICIENCY	130 LM / W
LEDBEAMANGLE	36°
MATERIAL	ALUMINUMDIECASTING

2022 CONCEALED LIGHT



WATTAGE	10W	20W	30W	40W
DIAMETER	50MM	60MM	80MM	80MM
HEIGHT	135MM	150MM	180MM	195MM

BODYCOLOUR	WHITE/BLACK
LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
CHANNEL	2/3WIRE
COLOURTEMP	2700/3000K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140 LM / W
REFLECTOR	DARKOO/INDIAN
LED BEAM ANGLE	24° / 36° / 60°
MATERIAL	ALUMINUMDIECASTING

2022 CONCEALED LIGHT COLOURRING



WATTAGE	30W
DIAMETER	80MM
HEIGHT	180MM
LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
RING COLOUR	WHITE/SHININGBLACK/ROSEGOLD/CHROME
BODY COLOUR	WHITE / BLACK
COLOURTEMP	2700/3000K/4000K/5000K/6500K
LUMEN EFFICIENCY	120-140LM/W
LED BEAM ANGLE	40°
MATERIAL	ALUMINUMDIECASTING



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE

2022 WALL LIGHT



WATTAGE	10W	20W	30W	40W
DIAMETER	50mm	60mm	80mm	80mm
HEIGHT	135mm	150mm	180mm	195mm
LED	CREE/BRIDGELUX			
DRIVER	PHILIPS/FULHAM/OSRAM			
COLOUR TEMP	2700/3000K/4000K/5000K/6500K			
LUMEN EFFICIENCY	120- 140 LM / W			
REFLECTOR	DARKOO/INDIAN			
LED BEAM ANGLE	24° /40° / 60°			
BODY COLOUR	WHITE/BLACK			
MATERIAL	ALUMINUM			

2022 WALL LIGHT COLOURRING



WATTAGE	25W	30W
DIAMETER	80mm	80mm
HEIGHT	180mm	180mm
LED	CREE/BRIDGELUX	
DRIVER	PHILIPS/FULHAM/OSRAM	
COLOUR TEMP	2700/3000K/4000K/5000K/6500K	
LUMEN EFFICIENCY	120-140 LM / W	
RING COLOUR	WHITE/SHININGBLACK/CHROME/ROSEGOLD	
BODY COLOUR	WHITE/BLACK	
MATERIAL	ALUMINUM	

GLORIA WALL LIGHT



WATTAGE	18W	20W	24W
DIAMETER	70mm	70mm	70mm
HEIGHT	150mm	150mm	150mm
LED	CREE/BRIDGELUX		
DRIVER	PHILIPS/FULHAM/OSRAM		
COLOUR TEMP	2700/3000K/4000K/5000K/6500K		
LUMEN EFFICIENCY	120- 140 LM / W		
RING COLOUR	WHITE/SHININGBLACK/CHROME/ROSEGOLD		
BODY COLOUR	WHITE/BLACK		
MATERIAL	ALUMINUM		



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



360° TILTABLE TRACKLIGHT



WATTAGE	10W	12W	15W
DIAMETER	80mm	80mm	80mm
HEIGHT	90mm	90mm	90mm
LED	CREE/BRIDGELUX		
DRIVER	PHILIPS/FULHAM/OSRAM		
COLOUR TEMP	2700/3000K/4000K/5000K/6500K		
LUMEN EFFICIENCY	120- 140 LM / W		
LED BEAM ANGLE	24° /40° / 60°		
BODY COLOUR	WHITE/BLACK		
MATERIAL	ALUMINUM		

360° TILTABLE CONCEALED LIGHT



WATTAGE	10W	12W	15W
DIAMETER	95mm	95mm	95mm
HEIGHT	79mm	79mm	79mm
CUTOUT	86mm	86mm	86mm
LED	CREE/BRIDGELUX		
DRIVER	PHILIPS/FULHAM/OSRAM		
COLOUR TEMP	2700/3000K/4000K/5000K/6500K		
LUMEN EFFICIENCY	120- 140 LM / W		
LED BEAM ANGLE	24°/40°/60°		
BODY COLOUR	WHITE/BLACK		
MATERIAL	ALUMINUM		

360° TILTABLE SURFACE LIGHT




WATTAGE	10W	12W	15W
DIAMETER	80mm	80mm	80mm
HEIGHT	90mm	90mm	90mm
LED	CREE/BRIDGELUX		
DRIVER	PHILIPS/FULHAM/OSRAM		
COLOUR TEMP	2700/3000K/4000K/5000K/6500K		
LUMEN EFFICIENCY	120- 140 LM / W		
LED BEAM ANGLE	24°/40°/60°		
BODY COLOUR	WHITE/BLACK		
MATERIAL	ALUMINUM		



RF 2.4G 

TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



BULLET SURFACE



WATTAGE	7W	12-18W	20-24W	25-30W	25-30W
DIAMETER	50mm	60mm	80mm	80mm	100mm
HEIGHT	105mm	150mm	150mm	180mm	150mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOURTEMP 2700/3000K/4000K/6500K
 LUMENEFFICIENCY 120-140LM/W
 LENSBEAMANGLE 40°
 REFLECTORCOLOUR WHITE/BLACK
 REFLECTOR INNER COLOUR WHITE / BLACK / SHINNING BLACK / ROSE GOLD
 BODY COLOUR WHITE/BLACK
 MATERIAL ALUMINUM



VENUS SURFACE



WATTAGE	7-18W	20-24W
DIAMETER	60mm	80mm
HEIGHT	150mm	150mm

LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 2700/3000K/4000K/6500K
 LUMEN EFFICIENCY 120- 140 LM / W
 LENSBEAMANGLE 40°
 BODYCOLOUR WHITE/BLACK
 MATERIAL ALUMINUM



RF 2.4G



TRICOLOURWITHRF+BT+WIFIDIMMINGAVAILABLE



SURFACE SQUARE COB



MODELNO	SQ12	SQ12X2	SQ12X3
WATTAGE	12W	12WX2	12WX3
DIAMETER	74X74mm	74X143mm	74X213mm
HEIGHT	95mm	95mm	95mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700K/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120 - 140 LM / W
LEDBEAMANGLE	40°
RING COLOUR	WHITE/BLACK/ROSEGOLD/GOLD/CHROME
BODY COLOUR	WHITE/BLACK
LUMINARIEMATERIAL	ALUMINUM

SURFACE LIGHT

SFR SURFACE ROUND COB



MODELNO	SFR7	SFR10	SFR12	SFR15	SFR18
WATTAGE	7W	10W	12W	15W	18W
DIAMETER	80mm	80mm	80mm	80mm	80mm
HEIGHT	110mm	150mm	150mm	180mm	180mm

LED	CREE/BRIDGELUX
DRIVER	PHILIPS/FULHAM/OSRAM
COLOUR TEMP	2700/3000K/3500K/4000K/5000K/6500K
LUMEN EFFICIENCY	120- 140 LM / W
LEDBEAMANGLE	40°
RING COLOUR	WHITE/BLACK/ROSEGOLD/GOLD/CHROME
BODY COLOUR	WHITE/BLACK
MATERIAL	ALUMINUM




CANNOPY HANGING
AVAILABLE IN WHITE/BLACK

TRICOLOUR WITH RF+BT+WIFI DIMMING AVAILABLE



RF 2.4G



SURFACE COB



MODEL NO	SF10	SF12	SF15	SF18	SF25	SF30	SF35	SF40
WATTAGE	10W	12W	15W	18W	25W	30W	35W	40-50W
DIAMETER	87mm	90mm	90mm	90mm	127mm	127mm	127mm	127mm
HEIGHT	80mm	110mm	110mm	110mm	137mm	137mm	137mm	205mm

LEDMAKE CREE/BRIDGELUX
DRIVER MAKE PHILIPS/FULHAM/OSRAM
COLOUR TEMP 2700/3000K/4000K/6500K
LUMEN EFFICIENCY 120-140 LM / W
LEDBEAMANGLE 40°
BODYCOLOUR WHITE/BLACK
MATERIAL ALUMINUM

CANNOPYHANGING
 AVAILABLE IN WHITE/BLACK



FB CURVE SURFACE



MODEL NO	SFCUR12	SFCUR18	SFCUR30
WATTAGE	12W	18W	30W
DIAMETER	80mm	80mm	80mm
HEIGHT	110mm	150mm	180mm

LEDMAKE CREE/BRIDGELUX
DRIVER MAKE PHILIPS/FULHAM/OSRAM
COLOUR TEMP 2700/3000K/4000K/6500K
LUMEN EFFICIENCY 120-140 LM / W
LEDBEAMANGLE 40°
BODYCOLOUR WHITE/BLACK
MATERIAL ALUMINUM

LLM SURFACE



SFLLM21

Model No. :	SFLLM21
Wattage :	21 W
Light Source :	Philips LLM
CCT :	4000K
Lumen Output:	1800 lm
LED Beam Angle :	160°
Power Factor :	> 0.95
IP Rating :	IP20



RF 2.4G



TRICOLOUR WITH RF+BT+WIFI DIMMING AVAILABLE

PHILIPS LED DISK SURFACE



MODEL NO	LE666
WATTAGE	11 W
LIGHTSOURCE	PhilipsLedisk
CCT	3000K/4000K/5000K
LUMEN OUTPUT	900lm
LEDBEAMANGLE	85°
POWER FACTOR	>0.95
IP RATING	Ip20

LINEA



MODELNO	HL5275
INSTALLATION	RECESSED/ARMSTRONGCELLINGINSTALLATION
WATTAGE	36W / 50W / 60W
DIMENSIONS	1195X145.0X81mmHT
DIFFUSER	PMMA
LED	BRIDGELUX
DRIVER	PHILIPS/FULHAM LUMENS CC100Lm/W,CV80Lm/W
COLOUR TEMP	3000K / 4000K / 6500K
IP RATING	IP20
MATERIAL	ALUMINUM
WEIGHT	3.2KG
RANGE	2FT/4FT/8FT




MODELNO	HL5035(50mm)
INSTALLATION	SUSPENDED/SURFACEMOUNTED
WATTAGE	30W / 40W / 50W
DIMENSIONS	1180X50.0X80mmHT
DIFFUSER	PMMA
LED	BRIDGELUX
DRIVER	PHILIPS/FULHAM
LUMENS	CC100Lm/W,CV80Lm/W
COLOUR TEMP	3000K / 4000K / 6500K
IP RATING	IP20
MATERIAL	ALUMINUM
WEIGHT	2.8KG
RANGE	2FT/4FT/8FT

MODELNO	HL7070(70mm)
INSTALLATION	SUSPENDED/SURFACEMOUNTED
WATTAGE	30W / 40W / 50W
DIMENSIONS	1180X50.0X80mmHT
DIFFUSER	PMMA
LED	BRIDGELUX
DRIVER	PHILIPS/FULHAM
LUMENS	CC100Lm/W,CV80Lm/W
COLOUR TEMP	3000K / 4000K / 6500K
IP RATING	IP 20
MATERIAL	ALUMINUM
WEIGHT	2.8KG
RANGE	2FT/4FT/8FT



RF 2.4G 

TRICOLOUR WITH RF+BT+WIFI DIMMING AVAILABLE



HANGING LIGHT



Diameter : 145mm
Height : 295mm
Inner Finish : Gold / Silver

CONE

Model No. : **CONE**
Wattage : 7 W
Light Source : Philips Argiter
CCT : 2700K / 4000K
Lumen Output: 300 lm
LED Beam Angle : 36°
Power Factor : > 0.95
IP Rating : IP20



Diameter : 145mm
Height : 295mm
Inner Finish : Gold / Silver

PRO

Model No. : **PRO**
Wattage : 11 W
Light Source : Philips Ledis
CCT : 3000K / 4000K / 5000K
Lumen Output: 900 lm
LED Beam Angle : 85°
Power Factor : > 0.95
IP Rating : IP20



Diameter : 165mm
Height : 295mm
Inner Finish : Gold / Silver

RIO

Model No. : **RIO**
Wattage : 11 W
Light Source : Philips Ledis
CCT : 3000K / 4000K / 5000K
Lumen Output: 900 lm
LED Beam Angle : 85°
Power Factor : > 0.95
IP Rating : IP20



HANGINGLIGHT



2X2 LED PANEL



MODEL NO	001/35MM
WATTAGE	36W/40W/45W
LED	BRIDGELUX/OSLON
DRIVER	PHILIPS/FULHAM
LUMENS	100Lm/ W
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 20
SURFACE2X2AVAILABLE	



MODELNO	002
WATTAGE	32W/40W
LED	PHILIPS
DRIVER	PHILIPS
LUMENS	2300Lm/3400Lm
COLOUR TEMP	4000K / 6500K
IP RATING	IP20
POWEREDBYPHILIPS	

CLEAN ROOM FITTING



MODEL	TOP
OPENINGWATTAGE	36W/40W/45W/60W
LED	BRIDGELUX / OSLON
DRIVER	PHILIPS/FULHAM
LUMENS	100Lm/ W
COLOURTEMP	3000K/4000K/6500K
BODY	CRCA
TOPFRAME	CRCA / SS
DIMENSION	640X640X95MM



MODEL	BOTTOM OPENING
WATTAGE	36W/40W/45W/60W
LED	BRIDGELUX / OSLON
DRIVER	PHILIPS/FULHAM
LUMENS	100Lm/ W
COLOURTEMP	3000K/4000K/6500K
BODY	CRCA
TOPFRAME	CRCA / SS
DIMENSION	640X640X95MM

TOP FRAME & TOP COVER



LED STRIPS



MODEL DCSTRIP
 TEMP COLOUR 2700K/3000K/4000K
 5000/6500/RGB/PINK
 AMBER/BLUE/GREEN
 PURPLE/ICEBLUE

IPRATING IP20/IP65
 IRREMOTECONTROLLABLE
 DIMMING / NON DIMMING

OUTDOORWALLWASHERSTRIP



MODEL 48LED24VWALLWASHER
 WATTAGE 24W
 LEDTYPE 48LED
 COLOURTEMP2700K/3000K/4000K/RGB IP
 RATING IP65
 DIMMING/NONDIMMING INPUT
 24V DC

MODEL-283512V

LEDTYPE	60	120	120	180	240	240
WATTAGE	5W	11W	15W	17W	18W	22W
VOLTAGE	12V	12V	12V	12V	12V	12V
SIZE(WIDTH)	8MM	8MM	5MM	8MM	10MM	10MM

MODEL-283524V

LEDTYPE	60	120	120	180	240	4IN1	5IN1	120 CCT
WATTAGE	9W	14W	14W	20W	24W	8W	8W	8W
VOLTAGE	24V	24V	24V	20V	24V	24V	24V	24V
SIZE(WIDTH)	8MM	8MM	5MM	8MM	10MM	12MM	12MM	10MM



MODEL- NEON TUBES

LEDTYPE	120	120	120	240	240	1202LINE
WATTAGE	11W	8W	11W	20W	20W	16W
VIEWSIZE(WIDTH)	SIDE	TOP	TOP	TOP	TOP	TOP
DIMENSION	8MM	5MM	8MM	10MM	10MM	16MM
	612	1010	1212	1616	2014	3020

MODEL DCSTRIP
 COLOURTEMP2700K/3000K/4000K/5000/6500/RGB/PINK/AMBER/BLUE GREEN /
 PURPLE / ICE BLUE
 IP RATING IP20
 IRREMOTECONTROLLABLE
 DIMMING/NON DIMMING



MODEL-ROPELIGHT

LEDTYPE	60	96	120	144	180	60	120
WATTAGE	6W	7W	8W	9W	10W	5W	8W
VOLTAGE	220V	220V	220V	220V	220V	220VRGB	220VCCT

MODEL DCSTRIP
 COLOURTEMP2700K/3000K/4000K/6500K/RED/GREEN/BLUE/PINK/ AMBER /
 PURPLE / ICE BLUE
 IP RATING Ip65
 IRREMOTECONTROLLABLE
 DIMMING/NON DIMMING



PHILIPS SMPS



MODEL 12W1A12V
WATTAGE 12W
AMPS 1A
VOLT 12V
IP 20



MODEL 24W2A12V
WATTAGE 24W
AMPS 2A
VOLT 12V
IP 20



MODEL 36W3A12V
WATTAGE 36W
AMPS 3A
VOLT 12V
IP 20



MODEL 60W5A12V
WATTAGE 60W
AMPS 5A
VOLT 12V
IP 20



MODEL 120W10A12V
WATTAGE 120W
AMPS 10A
VOLT 12V
IP 20



MODEL 150W12.5A12V
WATTAGE 150W
AMPS 12.5A
VOLT 12V
IP 66



MODEL 300W25A12V
WATTAGE 300W
AMPS 25A
VOLT 12V
IP 66

OSRAM SMPS



MODEL
WATTAGE
AMPS
VOLT
IP



MODEL 120W 5A 24V
WATTAGE 120W
AMPS 5A
VOLT 24V
IP 20



MODEL 180W7.5A24V
WATTAGE 180W
AMPS 7.5A
VOLT 24V
IP 20

BULKHEAD LIGHT



MODEL

BK5
WATTAGE 5W
LED BRIDGELUX
COLOURTEMP 3000K/4000K/6500K
LUMEN EFFICIENCY130 LM / W



MODEL BK9
WATTAGE 10W
LED BRIDGELUX
DRIVER PHILIPS
COLOURTEMP 3000K/4000K/6500K
LUMEN EFFICIENCY130 LM / W



GARDEN LIGHT

MODEL NO SP06/SP12
 WATTAGE 7W / 12W
 LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 BEAM ANGLE 20° / 40° / 60°
 MATERIAL ALUMINUM DIECASTING
 COLOURTEMP2700K/3000K/4000K/6500K IP
 RATING IP 65



MODEL NO PROJECTOR LIGHT
 WATTAGE 40-50W / 50-60W
 DIMENSION 100X200/120X220
 LED CREE/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 BEAM ANGLE 20° / 40° / 60°
 MATERIAL ALUMINUM DIECASTING
 COLOURTEMP2700K/3000K/4000K/6500K IP
 RATING IP 65



SPIKE LIGHT


MODELNO SP5
 WATTAGE 3W- 5W
 LED CREE/LUMILED/BRIDGELUX
 DRIVER PHILIPS
 BEAMANGLE 40°
 MATERIAL ALUMINUMDIECASTING
 COLOURTEMP 2700K/3000K/4000K/6500K
 IPRATING IP65



MODELNO SP10/SP20
 WATTAGE 8W-12W/12-20W
 LED CREE/LUMILED/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 BEAMANGLE 40°
 MATERIAL ALUMINUMDIECASTING
 COLOURTEMP 2700K/3000K/4000K/6500K
 IPRATING IP65



MODELNO Sp8
 WATTAGE 8W-12W
 LED CREE/LUMILED/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 BEAM ANGLE 40°
 MATERIAL ALUMINUM DIECASTING
 COLOURTEMP2700K/3000K/4000K/6500K IP
 RATING IP 65

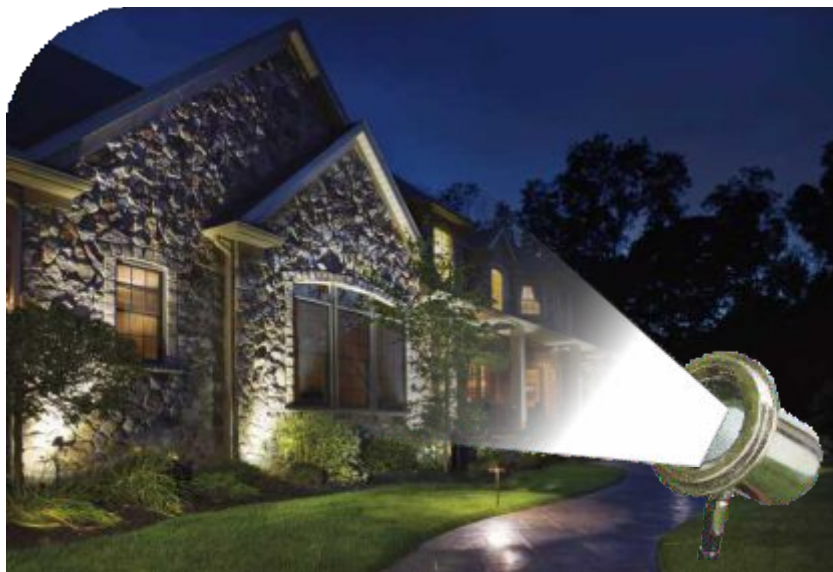

BOLLARDS



CAMPBOLL12W



BOING12X2W



BOINGPRO12X2W



TONICBOLL12W



DINO12W



SHELL18W



BOINGMINI12W



FROST12W



WALLLIGHT

CAMPWALLLIGHT12W

UP/DOWN (LED DISK)



UP7

Model No. : **UP7**
Wattage : 7 W
Light Source : Philips Jupiter
CCT : 2700K / 4000K
Lumen Output: 900 lm
LED Beam Angle : 36°
Power Factor : > 0.95
IP Rating : IP20



UP11

Model No. : **UP11**
Wattage : 11 W
Light Source : Philips Ledis
CCT : 3000K / 4000K / 5000K
Lumen Output: 900 lm
LED Beam Angle : 85°
Power Factor : > 0.95
IP Rating : IP20



UP DOWN 14

Model No. : **UP DOWN 14**
Wattage : 14 W
Light Source : Philips Jupiter
CCT : 2700K / 4000K
Lumen Output: 600 lm
LED Beam Angle : 36°
Power Factor : > 0.95
IP Rating : IP20



UP DOWN 22

Model No. : **UP DOWN 22**
Wattage : 22 W
Input Voltage : 180V to 300V, 50Hz
Light Source : Philips Ledisk
CCT : 3000K / 4000K / 5000K
Lumen Output: 1800 lm
Beam Angle : 85°
Power Factor : > 0.95
IP Rating : IP20



UP LIGHT



WATTAGE:	3-7W	10W	12-15W
DIA:	50mm	60mm	80mm
HEIGHT :	120mm	150mm	150mm

LED:DRIVER : PHILIPS/FULHAM/OSRAM
 REFLECTOR : CREE /BRIDGELUX DARKOO
 BEAMANGLE: / INDIAN
 BODY COLOUR : 24°/40°/60°
 WHITE/BLACK/GREY
 MATERIAL: ALUMINUM

UP & DOWNLIGHT



WATTAGE:	7X2W	10X2W	15X2W
DIA:	50mm	60mm	80mm
HEIGHT :	150mm	170mm	195mm

LED:DRIVER : PHILIPS/FULHAM/OSRAM
 REFLECTOR : CREE /BRIDGELUX DARKOO
 BEAMANGLE: / INDIAN
 BODY COLOUR : 24°/40°/60°
 WHITE/BLACK/GREY
 MATERIAL: ALUMINUM

STREET LIGHT



MODELNO SG18/24
 WATTAGE 15W - 20W / 24W - 30WLED
 PHILIPS/OSRAM/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 MATERIAL ALUMINUM DIECASTING
 DIMENSION 18W - 270 X 85 X 55mm
 24W-103X325X55mm

MODELNO SG36
 WATTAGE 30W-40W
 LED PHILIPS/OSRAM/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 MATERIAL ALUMINUM DIECASTING
 DIMENSION 343 X 135 X 60mm


MODELNO SG50
 WATTAGE 40W-50W
 LED PHILIPS/OSRAM/BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 MATERIAL ALUMINUM DIECASTING
 DIMENSION 145 X 380 X 60mm



STREET LIGHTS



MODELNO BOAT30
WATTAGE 18W-30W
LED PHILIPS/OSRAM/BRIDGELUX
LEDTYPE SMDHIGH/MIDPOWER
DRIVER PHILIPS/FULHAM/OSRAM
MATERIAL ALUMINUM DIECASTING
COLOUR TEMP 3000K / 4000K / 6500K IP
RATING IP 65
DRIVER AREA 110X6X35mm
PCB AREA 105X67mm

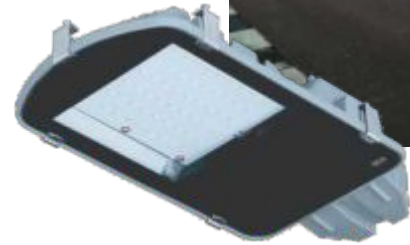

MODELNO BOAT50
WATTAGE 36W-50W
LED PHILIPS/OSRAM/BRIDGELUX
LEDTYPE SMDHIGH/MIDPOWER
DRIVER PHILIPS/FULHAM/OSRAM
MATERIAL ALUMINUM DIECASTING
COLOUR TEMP 3000K / 4000K / 6500K IP
RATING IP 65
DRIVER AREA 110X60X35mm
PCB AREA 140X67mm

MODELNO FH120
WATTAGE 100W-120W
LED PHILIPS/OSRAM/BRIDGELUX
LEDTYPE SMDHIGH/MIDPOWER
DRIVER PHILIPS/FULHAM/OSRAM
MATERIAL ALUMINUM DIECASTING
COLOUR TEMP 3000K / 4000K / 6500K IP
RATING IP 65



MODELNO BOAT90
WATTAGE 50W-90W
LED PHILIPS/OSRAM/BRIDGELUX
LEDTYPE SMDHIGH/MIDPOWER
DRIVER PHILIPS/FULHAM/OSRAM
MATERIAL ALUMINUM DIECASTING
COLOUR TEMP 3000K / 4000K / 6500K IP
RATING IP 65
DRIVER AREA 100X120X36mm
PCB AREA 195X67mm



MODELNO FH150
WATTAGE 100W-150W
LED PHILIPS/OSRAM/BRIDGELUX
LEDTYPE SMDHIGH/MIDPOWER
DRIVER PHILIPS/FULHAM/OSRAM
MATERIAL ALUMINUM DIECASTING
COLOUR TEMP 3000K / 4000K / 6500K IP
RATING IP 65

FLOOD LIGHTS



MODEL NO	DOWNCHOWK30/50
WATTAGE	30W - 50W
LED	PHILIPS/OSRAM/BRIDGELUX
LEDTYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOUR TEMP	3000K / 4000K / 6500K IP
RATING	IP 65



MODEL NO	DOWNCHOWK100/150
WATTAGE	100W - 150W
LED	PHILIPS/OSRAM/BRIDGELUX
LEDTYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOUR TEMP	3000K / 4000K / 6500K IP
RATING	IP 65



MODELNO	HF60
WATTAGE	60W-100W
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMD HIGH / MID POWER
DRIVER	PHILIPS / FULHAM / OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOUR TEMP	3000K / 4000K / 6500K
IPRATING	IP65



MODELNO	HF120
WATTAGE	100W-150W
LED MAKE	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMD HIGH / MID POWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOUR TEMP	3000K / 4000K / 6500K IP
RATING	IP 65



MODELNO	HF200
WATTAGE	200W-300W
LED	PHILIPS/OSRAM/BRIDGELUX
LEDTYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOUR TEMP	3000K / 4000K / 6500K IP
RATING	IP 65



MODELNO	HF400
WATTAGE	350W-400W
LED	PHILIPS/OSRAM/BRIDGELUX
LEDTYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOUR TEMP	3000K / 4000K / 6500K IP
RATING	IP 65


MODULAR FLOOD LIGHT




MODEL NO	MODULAR75
WATTAGE	50W - 75W
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65




MODEL NO	MODULAR150
WATTAGE	100W - 150W
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65



MODEL NO	MODULAR200
WATTAGE	150W - 220W
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65



MODEL NO	MODULAR300
WATTAGE	250W - 300W
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65



MODEL NO	MODULAR400
WATTAGE	350W - 450W
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65



MODEL NO	UFO HIGHBAY 50 / 100
WATTAGE	30W - 50W / 75W - 100W
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65

HIGHBAY



MODEL NO	UFO HIGHBAY 150 / 250
WATTAGE	120W-150W/180W-250W LED
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65



MODEL NO	HIGHBAY 50 / 100
WATTAGE	30W - 50W / 75W - 100W
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65



MODEL NO	HIGHBAY 150 / 250
WATTAGE	100W-150W/175W-250W LED
LED	PHILIPS/OSRAM/BRIDGELUX
LED TYPE	SMDHIGH/MIDPOWER
DRIVER	PHILIPS/FULHAM/OSRAM
MATERIAL	ALUMINUM DIECASTING
COLOURTEMP	3000K/4000K/6500K IP
RATING	IP 65

HIGHBAY



APPLICATION: STREET, WAREHOUSE, FACTORIES, INDUSTRIES.

MODELNO HH503
WATTAGE 50W-75W
LED PHILIPS/OSRAM/BRIDGELUX
LED TYPE SMD HIGH / MID POWER
DRIVER PHILIPS / FULHAM / OSRAM
MATERIAL ALUMINUM DIECASTING
COLOUR TEMP 3000K / 4000K / 6500K
IP RATING IP65



MODELNO HH150
WATTAGE 85W-150W
LED PHILIPS/OSRAM/BRIDGELUX
LEDTYPE SMDHIGH/MIDPOWER
DRIVER PHILIPS/FULHAM/OSRAM
LUMINARIEMATERIAL ALUMINUMDIECASTING
COLOUR TEMP 3000K/4000K/6500K
IP RATING IP 65




MODEL NO HHV204
WATTAGE 50W-250W
LED PHILIPS/OSRAM/ BRIDGELUX
LEDTYPE SMDHIGH/MIDPOWER
DRIVER PHILIPS/FULHAM/OSRAM
LUMINARIEMATERIAL ALUMINUMDIECASTING
COLOUR TEMP 3000K / 4000K / 6500K
IP RATING IP65



MODEL NO HH110LENS
WATTAGE 100 - 160W
LED PHILIPS/OSRAM/ BRIDGELUX
LEDTYPE SMDHIGH/MID POWER
DRIVER PHILIPS / FULHAM/ OSRAM
MATERIAL ALUMINUM DIECASTING
COLOUR TEMP 3000K / 4000K / 6500K
RATING IP 65

MODEL NO HH200UFO
WATTAGE 150 - 250W
LED MAKE PHILIPS/OSRAM/BRIDGELUX
LED TYPE SMD HIGH / MID POWER
DRIVER PHILIPS / FULHAM/ OSRAM
MATERIAL ALUMINUM DIECASTING
COLOUR TEMP 3000K / 4000K / 6500K
RATING IP 65

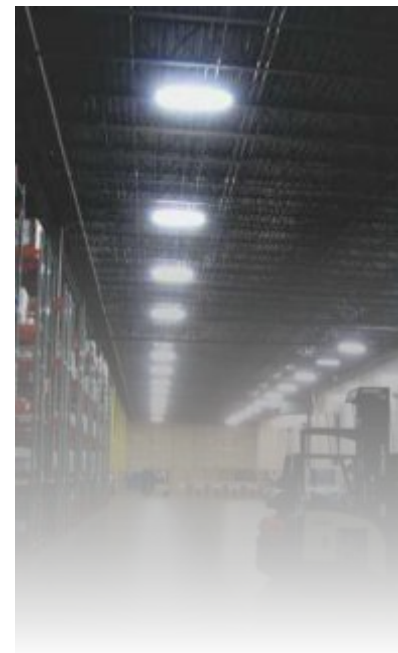

POST TOP



MODEL: **HL020**
 WATTAGE 50W/60W
 LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 130LM/W
 IP RATING IP65
 SIZE 450X450X65MM



MODEL: **HL030**
 WATTAGE 50W/60W
 LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 130 LM / W
 IP RATING IP65
 SIZE 440X440MM



MODEL: **HL040**
 WATTAGE 90W/100W
 LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 130 LM / W
 IP RATING IP65
 SIZE 560X65MM



MODEL: **HL050**
 WATTAGE 50W/60W
 LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR 3000K/4000K/6500K
 LUMEN EFFICIENCY 130 LM / W
 IP RATING IP65
 SIZE 560X320X65MM



POST TOP



MODEL: HL070
 WATTAGE 100W /160W
 LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMENEFFICIENCY130LM/W
 IPRATING IP65
 SIZE 560X65MM




MODEL: HANSPOST
 WATTAGE 33W
 LIGHT SOURCE PHILIPS MODULE
 COLOUR TEMP 3000K/4000K/6500K
 LUMEN EFFICIENCY 130 LM / W
 IPRATING IP65
 SIZE 535X745MM



MODEL: NEO
 WATTAGE 7W
 LED SOURCE PHILIPSJUPITER
 COLOUR TEMP 2700K/4000K/5000K
 LUMENEFFICIENCY130LM/W
 IPRATING IP65
 SIZE 410X350X160MM



MODEL: ANTILLA
 WATTAGE 45W
 LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMENEFFICIENCY100LM/W
 IPRATING IP65
 SIZE 527X151MM
 POLESIZE 70MM

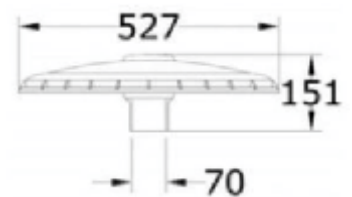


POST TOPS



MODEL: HL080
 WATTAGE 50W
 LED BRIDGELUX
 DRIVER PHILIPS/FULHAM/OSRAM
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 130 LM / W
 IP RATING IP65
 SIZE 550X360X300MM



MODEL: HL090
 WATTAGE 100W
 LED BRIDGELUX/PHILIPS/OSARAM
 DRIVER PHILIPS/OSARAM/FULHAM
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 130LM/W
 IP RATING IP65
 SIZE 550X360X300

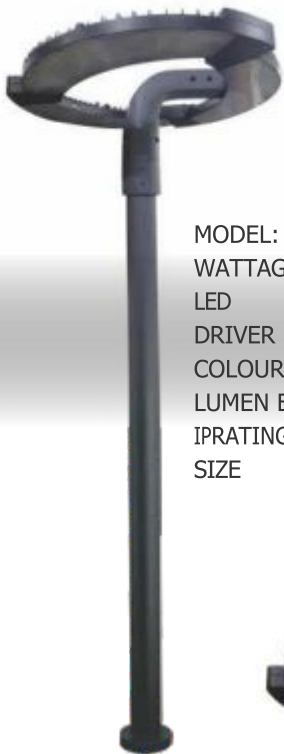

MODEL: HL011
 WATTAGE 150W
 LED BRIDGELUX/PHILIPS/OSARAM
 DRIVER PHILIPS/OSARAM/FULHAM
 COLOUR TEMP 3000K / 4000K / 6500K
 LUMEN EFFICIENCY 130 LM / W
 IP RATING IP65
 SIZE 600X300



